


MICRO COAX Cable with IPEX Cabline CAIIPlus

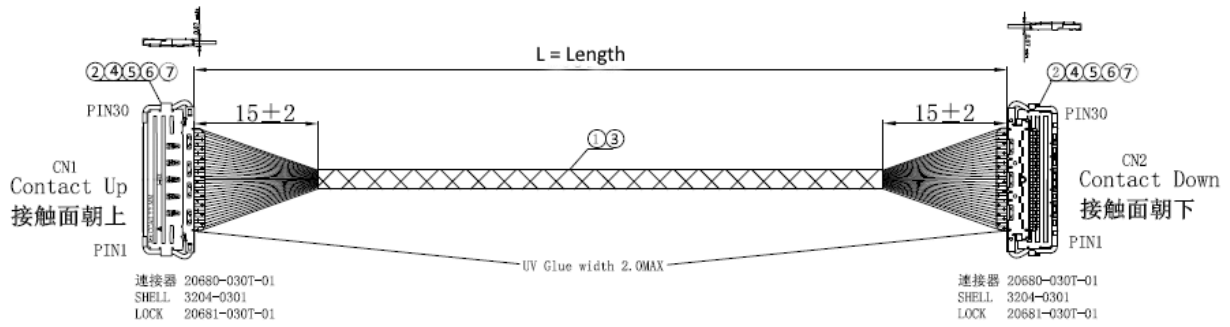

Drawing (only for reference) shows round binding with acetate cloth tape

1 wire – micro coax	AWG 42/ 50Ω green UL11130
2 connector IpeX Cabline-CA II Plus – 0.4 pitch / (20-60 Pos.)	Plug: 20680-0xxT-01; Shell: 3204-0xx1; Lock Bar 20789-0xxT-01 / (Receptacle 20790-0xxE-02)
3 Kapton	Kapton
4 Binding	Round Binding with acetate cloth - E304309 >800mm Partial Round Binding
5 Ground Bar	WG/B-002DA
6 UV Glue	HD1232
7 Laser marking	Aix CAIIPlus YY.MM
Transfer rate	20Gbps
Operation temperature / rated voltage	-35°C - +85°C / 30V

All materials are RoHS / REACH compliant with UL File numbers from ISO certified suppliers



How to Order

CCAIIPlus – nn – LLL – ii – B

- C C=Connection
 - 1=Connection 1:1
 - N=Connection 1:N
 - X=000N customer specific
- B=Binding
 - 0=(null) w/o Binding
 - R=Round with Acetate Cloth**
 - P= Partial Round Binding
 - F=Flat with Acetate Cloth
 - S=Spiral
 - L=Laminated
- ii=Impedance e.g. 50Ω
- LLL=Length in mm optional
- nn=No. of Position

CCAII=Series Name: IPEX Cabline CAII

For Example: CCAIIPlus-50-300-50-R1

MICRO COAX Cable with IPEX Cabline CAIIPlus

For Custom Solution fill in this Form

*1 Use Supplier Pin Count

*2 Choose: MC = Micro Coaxial or TC = Twin Coaxial or DW = Discrete Wire

*3 Depending on Connector Specification – make sure wires of the same type are together

Total Length:

	<- CN1	Partnumber	CN2 ->	
CN1	Wire	AWG	Impedance	CN2
Pin	Type		1/Ohm	Pin
*1	*2	*3		
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				
21				
22				
23				
24				
24				
25				
26				
27				
28				
29				
30				
31				
32				
33				
34				
35				
36				
37				
38				
39				
40				