


## MICRO COAX Cable with IPEX Cabline CUY

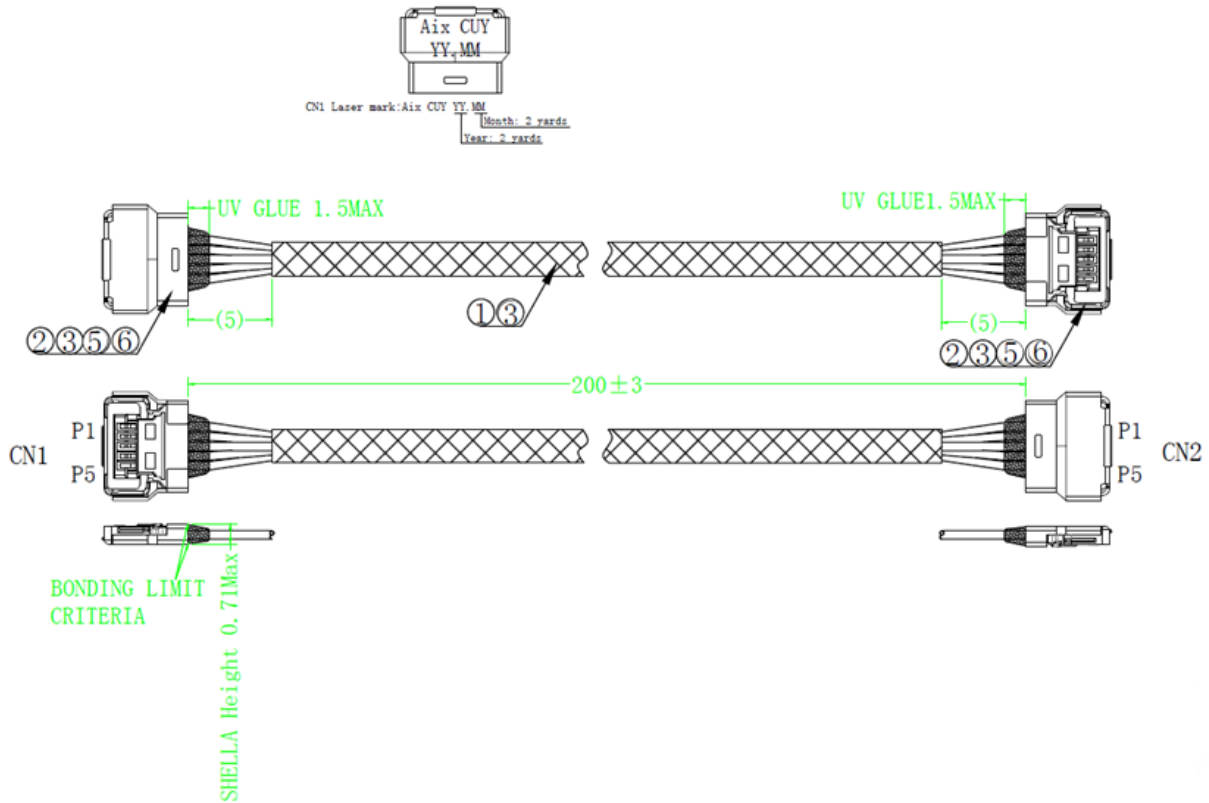

**Drawing (only for reference) shows Standard: Round Binding with acetate cloth tape**

1 wire – micro coax	AWG 42/ 50Ω green UL11130
2 / 4 connector IpeX Cabline UY – 0.35 pitch / (05 + 10 Pos. cable plug)	Plug.: 20907-0xxE-01; shell: 3568-0xx1( Receptacle 20854-0xxE-02)
3 Binding	Standard: Round binding with acetate cloth - E304309 >800mm Partial Round Binding
5 UV Glue	HD1232 width 2.0Max
6 Laser marking	Aix CUY YY.MM
Transfer rate	5Gbps (reference only)
Operation temperature / rated voltage	-40°C - +85°C / 60V

All materials are RoHS / REACH compliant with UL File numbers from ISO certified suppliers



## MICRO COAX Cable with IPEX Cabline CUY

### How to Order

CUY – nn – LLL – ii – B C

C=Connection  
 1=Connection 1:1  
 N=Connection 1:N  
 X= Customer specific 1:X

B=Binding  
 0=(null) w/o Binding  
**R=Round with Acetate Cloth**  
 P= Partial Round Binding  
 F=Flat with Acetate Cloth  
 S=Spiral  
 L=Laminated

ii=Impedance e.g. 50Ω

LLL=Length in mm optional

nn=No. of Position

CUY=Series Name: IPEX Cabline-UY

For Example: CUM-30-500-50-R1

Beschreibung: Cable IpeX Cabline CUY 30-30 Pos. TL500mm AWG42 50Ohm round binding connection 1:1

### For Custom Solution fill in this Form

\*1 Use Supplier Pin Count

\*2 Choose: MC = Micro Coaxial or TC = Twin Coaxial or DW = Discrete Wire

\*3 Depending on Connector Specification – make sure wires of the same type are together

### Total Length:

	<- CN1	Partnumber	CN2 ->	
CN1	Wire	AWG	Impedance	CN2
Pin	Type		1/Ohm	Pin
*1	*2	*3		
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				