

REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

NOTES:
 Current Rating:1.5AMP
 Contact Resistance:20mΩ max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact plating:Au or Sn Over Ni
 Insulator Material:PA6T+30%GF(UL94V-0)



HOW TO ORDER

BB - XX R XX - X



No. of Pins		Package Type:
10 30		A:Tray
14 34		B:Tube
16 40		C:W/Cap in Tube
20 44		D:W/o Cap in Tape & Reel
24 50		E:W/Film in Tube
26 60		F:W/Film in Tape & Reel
		R:With Cap in Tape & Reel

Plating Code

Full Gold Type	Selective Plated Type Gold Plated on Contact Area Tin Plated on Solder Area	Full Tin Type
00 : Gold Flash	S0: Gold Flash, Tin 100u"	T1 : Tin 100u"
01 : Gold 3u"	S1 : Gold 3u", Tin 100u"	T2 : Tin 200u"
02 : Gold 5u"	S2 : Gold 5u", Tin 100u"	T3 : Tin 150u"
03 : Gold 10u"	S3 : Gold 10u", Tin 100u"	
04 : Gold 15u"	S4 : Gold 15u", Tin 100u"	
05 : Gold 20u"	S5 : Gold 20u", Tin 100u"	
06 : Gold 30u"	S6 : Gold 30u", Tin 100u"	

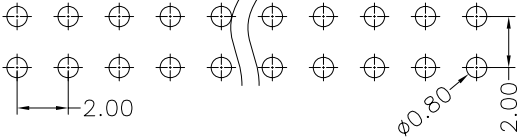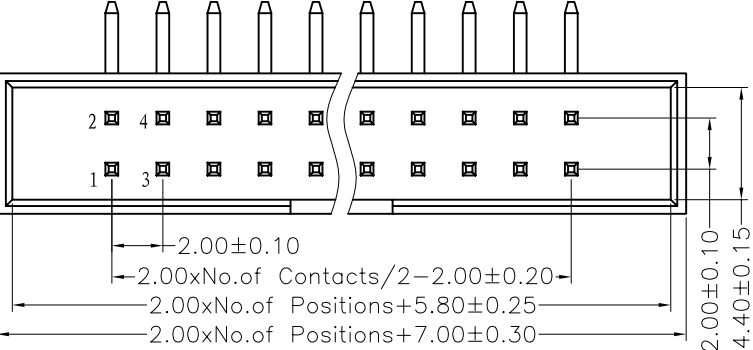

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

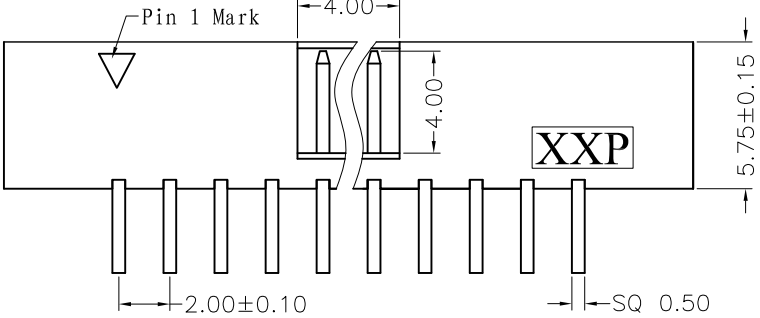

ElectronAix			
TOLERANCE:	PROJECTON		TITLE:
ANGLE ±3°	DATE	05-08-08'	2.00mm Box Header Straight Type H=5.7
X.XXX ±0.15	DRAWN	JXL	PART NO:
X.XX ±0.25	CHECKED		BB-XXRXX-X
X.X ±0.40	APPROVED		REV: UNIT: SCALE: SIZE:
X. ±0.50			A1 mm 2:1 A4