

RoHS compliant



REVISION DATA

SYM	ECN	DESCRIPTION	DATE	APPROVED

NOTES:

Current Rating:1.5AMP
 Contact Resistance:20mΩ max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact plating:Au or Sn Over Ni
 Insulator Material:PA6T+30%GF(UL94V-0)

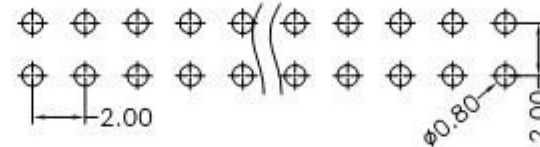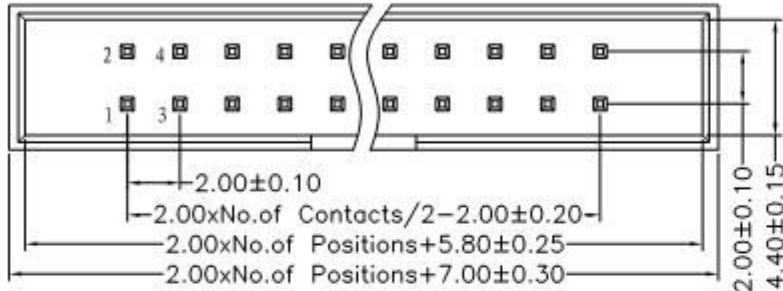



Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

HOW TO ORDER

BB - XX S XX - X

No. of Pins: 10 30, 14 34, 16 40, 20 44, 24 50, 26 60
 Package Type: A:Tray, B:Tube, C:W/Cap in Tube, D:W/o Cap in Tape & Reel, E:W/Film in Tube, F:W/Film in Tape & Reel, R:With Cap in Tape & Reel
 Plating Code

Full Gold Type	Selective Plated Type Gold Plated on Contact Area Tin Plated on Solder Area	Full Tin Type
00: Gold Flash	S0: Gold Flash, Tin 100u"	T1: Tin 100u"
01: Gold 3u"	S1: Gold 3u", Tin 100u"	T2: Tin 200u"
02: Gold 5u"	S2: Gold 5u", Tin 100u"	T3: Tin 150u"
03: Gold 10u"	S3: Gold 10u", Tin 100u"	MT: Matte Tin
04: Gold 15u"	S4: Gold 15u", Tin 100u"	
05: Gold 20u"	S5: Gold 20u", Tin 100u"	
06: Gold 30u"	S6: Gold 30u", Tin 100u"	

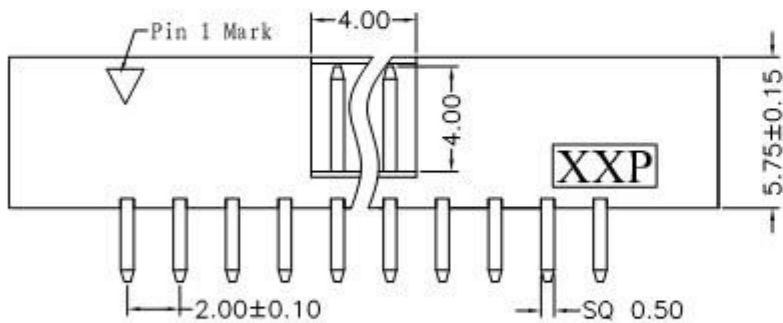

ElectronAix

TOLERANCE:	PROJECTON		TITLE:
ANGLE ±3°	DATE	05-06-08'	2.00mm Box Header Straight Type H=5.7
X.XXX ±0.15	DRAWN	JXL	PART NO:
X.XX ±0.25	CHECKED		BB-XXSXX-X
X.X ±0.40	APPROVED		REV: UNIT: SCALE: SIZE:
X. ±0.50			A mm 2:1 A4