
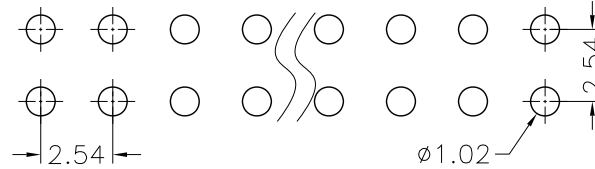


RoHS compliant

REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

NOTES:  
 Current Rating:3.0AMP  
 Contact Resistance:20mΩ max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ min  
 Operation Temperature:-40°C to +105°C


Contact Material:Brass  
 Contact plating:Au or Sn Over Ni  
 Insulator Material:PBT or PA6T+30%GF(UL94V-0)

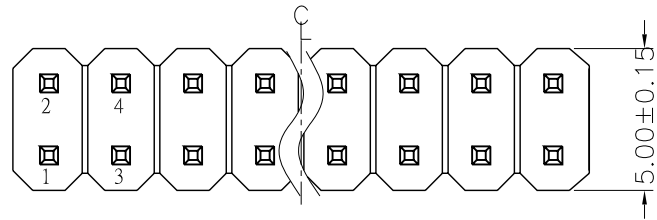



Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

HOW TO ORDER

PAD- D XX S XX - B-C-A - X - X - X

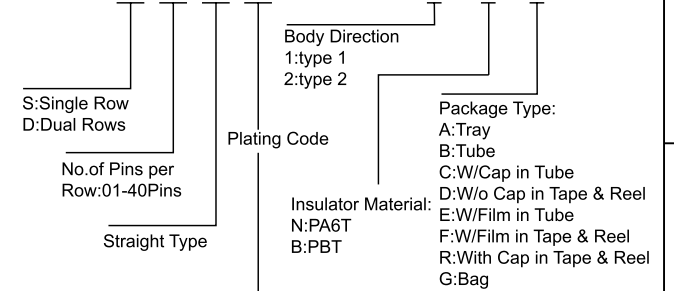

Full Gold Type	Selective Plated Type Gold Plated on Contact Area Tin Plated on Solder Area	Full Tin Type
00 : Gold Flash	S0: Gold Flash, Tin 100u"	T1 : Tin 100u"
01 : Gold 3u"	S1 : Gold 3u", Tin 100u"	T2 : Tin 200u"
02 : Gold 5u"	S2 : Gold 5u", Tin 100u"	T3 : Tin 150u"
03 : Gold 10u"	S3 : Gold 10u", Tin 100u"	MT: Matte Tin
04 : Gold 15u"	S4 : Gold 15u", Tin 100u"	
05 : Gold 20u"	S5 : Gold 20u", Tin 100u"	
06 : Gold 30u"	S6 : Gold 30u", Tin 100u"	

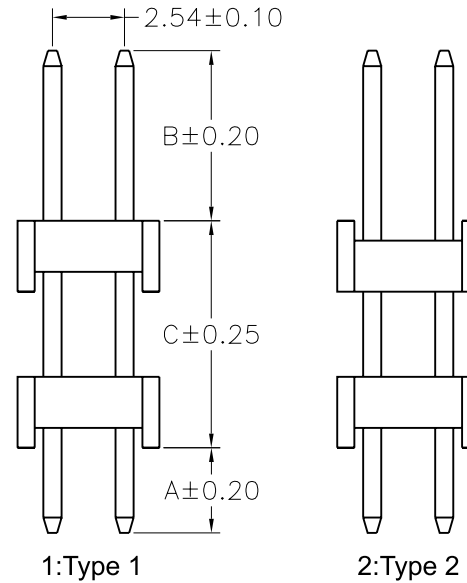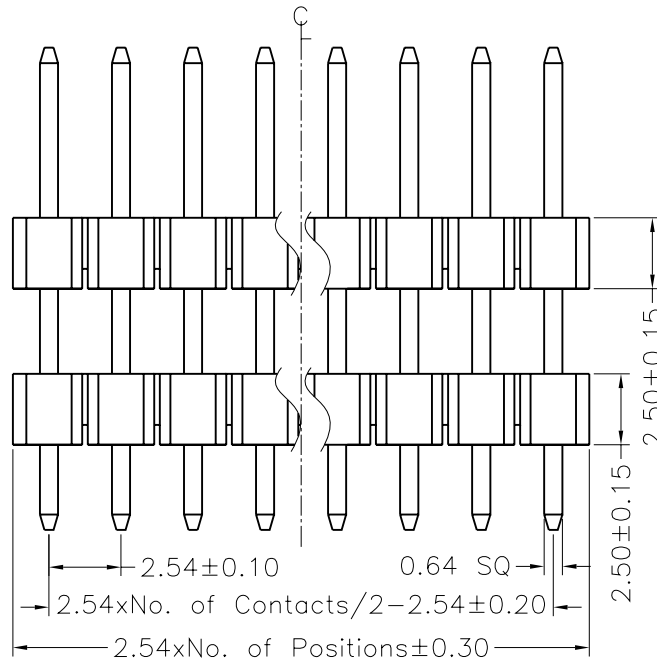

ElectronAix

TOLERANCE: ANGLE ±3' X.XXX ±0.15 X.XX ±0.25 X.X ±0.40 X. ±0.50	PROJECTON DATE DRAWN CHECKED APPROVED	 05-18-08' JXL	TITLE: 2.54mm Pin Header Dual Row Double Plastic Straight Type H=2.5mm PART NO: PAD-DXXSXX-B-C-A-X-X-X REV: UNIT: SCALE: SIZE: A mm 2:1 A4
-------------------------------------------------------------------------------	---------------------------------------------------	----------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------