

## USB 3.0 - 5Gbit/sec Type-A-Plug to Micro-B Cable for max Length 3m (5m)



### Features

- Compliant with USB 3.0
- Length up to 3,0m
- Datarate up to 5Gbit/sec
- Cable resistance 3  $\Omega$
- Customization possible





### Dragchain

- Radius: 30mm (6\*D)
- Frequency: 90 Cycles / Minute
- Distance: 900mm
- Cycles: 3.000.000

## Applications

- Industrial PC
- Cameras + Vision Systems
- Docking stations
- Desktop, Tablets, and Mobile Phones
- Gaming consoles, Smart TVs

# Physical Drawing

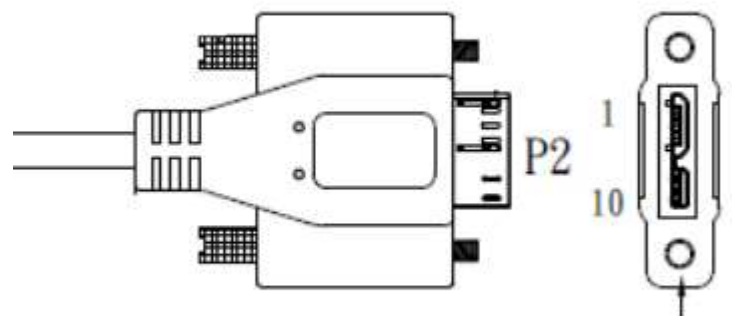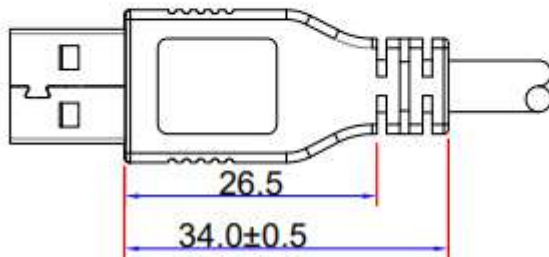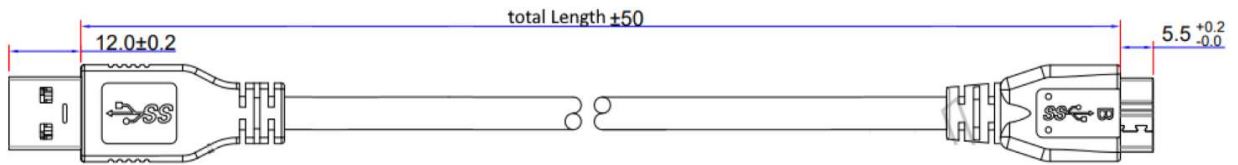


Front side

# Specification

Supported USB	USB3.0 USB2.0	
Supported Displayport	No	
Maximum Data Rate	5Gbps	
E-Mark	No	
Supported Cable Length	Custom; max. 3,0m according to USB – (5,0m Non USB)	
O.D.	5.5mm	
Cable Type	USB-C Cable	
Cable Jacket	PVC	
Cable Color	Black	
Plugs	A: USB-A Plug, Nickel Plated	B: USB-Micro-B, Nickel Plated
Housings	A: PVC overmold	B: PVC overmold
Conductive Resistance	3Ω	
Output Current and Voltage	3A/5V/15W	
Compliance	RoHS/ Reach/ CE/ FCC	
Certifications	UL Production	
Flameability	UL94-VW1, Material with UL-File No.	
Standard Package	Bulk	
Production Standard	ISO9001+ISO14001+IATF16949	

# Dragchain Capability

Track S	900 mm
Radius R	30 mm
Frequency	90 Cycles / Minute
Cycles	>3.000.000

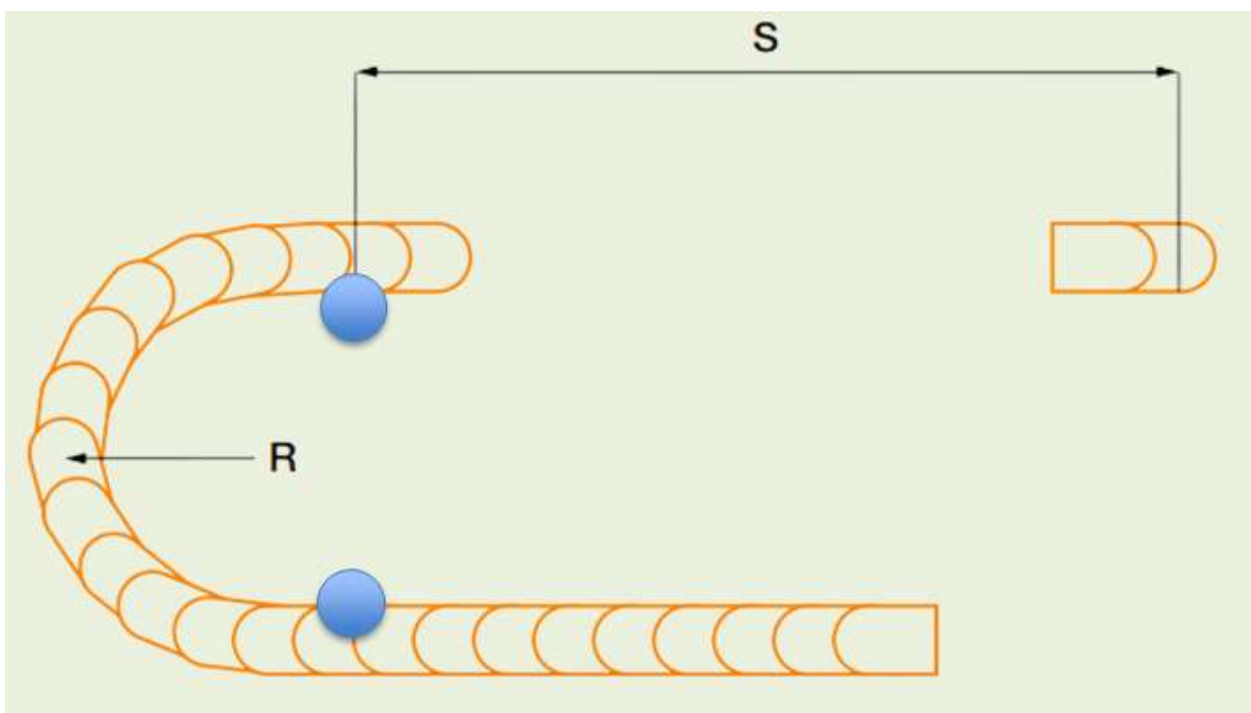

## How to order

TAM02-xxxxx-DS <-> xxxxx = total Length in mm

Partnumber	Description
TAM02-xxxxx-DS	xxxxx = Total Length in mm
TAM02-00500-DS	Total Length = .500 mm
TAM02-01000-DS	Total Length = 1.000 mm
TAM02-01100-DS	Total Length = 1.100 mm

## Please contact us for customization

### Available Options

- Custom length
- Custom connector
- Custom label on Cable
- Custom label on Packing
- Colour

*DisplayPort™ and the DisplayPort™ logo are trademarks owned by the Video Electronics Standards Association (VESA®) in the United States and other countries.*

*USB Type-C® and USB-C® are registered trademarks of USB Implementers Forum.*