


Dragchain USB 3.2 Gen1 - 5Gbit/sec 15W Type-C-m-Plug to Micro-B Cable for max Length 3m

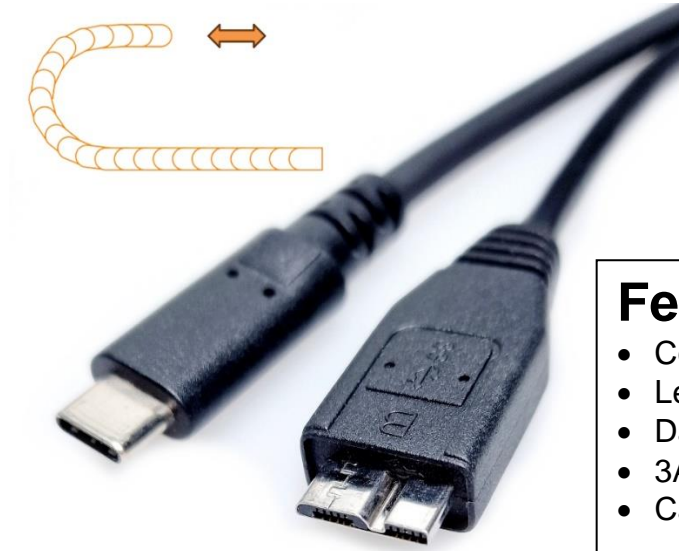

Features

- Compliant with USB 3.2 Gen1
- Length up to 3,0m
- Datarate up to 5Gbit/sec
- 3A/5V/15W
- Cable resistance 3 Ω
- Customization possible


Dragchain

- Radius: 30mm (6*D)
- Frequency: 90 Cycles / Minute
- Distance: 900mm
- Cycles: 3.000.000

Applications

- Industrial PC
- Cameras + Vision Systems
- Docking stations
- Desktop, Tablets, and Mobile Phones

Physical Drawing

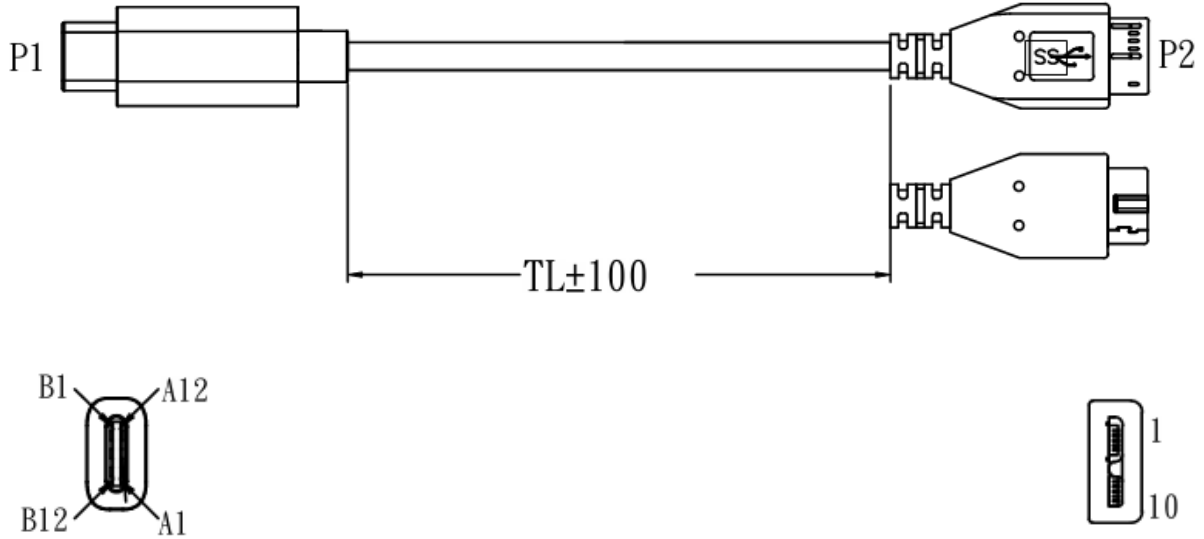

Connection


P1	CABLE		P2
V	UL20276		1
A7			2
A6			3
G1			5
A3			9
A2			10
G2			8
B10			6
B11			7
G1			

Specification

Supported USB	USB3.0 USB2.0	
Supported Displayport	No	
Maximum Data Rate	5Gbps	
E-Mark	No	
Supported Cable Length	Custom; max. 3,0m according to USB – (5,0m Non USB)	
O.D.	5.5mm	
Cable Type	USB-C Cable	
Cable Jacket	PVC	
Cable Color	Black	
Plugs	A: USB-C-m Plug, Nickel Plated	B: USB-Micro-B, Nickel Plated
Housings	A: PVC overmold	B: PVC overmold
Conductive Resistance	3Ω	
Output Current and Voltage	3A/5V/15W	
Compliance	RoHS/ Reach/ CE/ FCC	
Certifications	UL Production	
Flameability	UL94-VW1, Material with UL-File No.	
Standard Package	Bulk	
Production Standard	ISO9001+ISO14001+IATF16949	

Dragchain Capability

Track S	900 mm
Radius R	30 mm
Frequency	90 Cycles / Minute
Cycles	>3.000.000

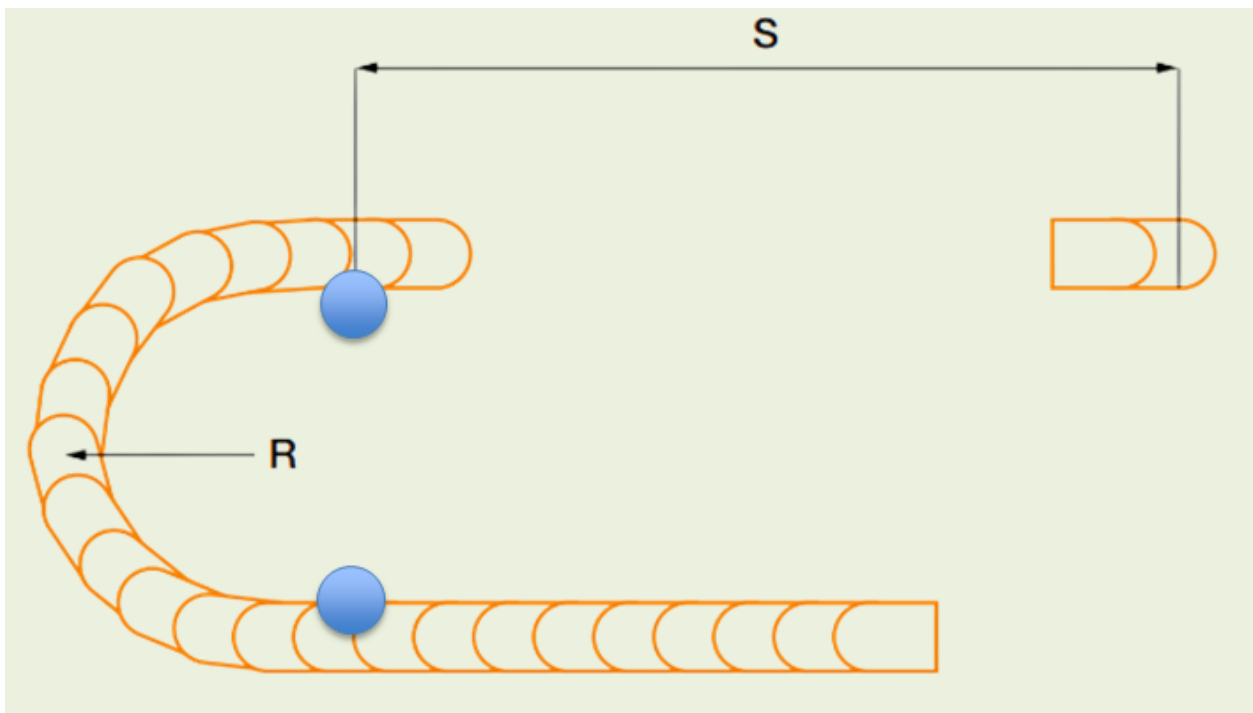

How to order

TCM02-xxxxx-D <-> xxxxx = total Length in mm

Partnumber	Description
TCM02-xxxxx-D	xxxxx = Total Length in mm
TCM02-00500-D	Total Length = .500 mm
TCM02-01000-D	Total Length = 1.000 mm
TCM02-03000-D	Total Length = 3.000 mm

Please contact us for customization

Available Options

- Custom length
- Custom connector
- Custom label on Cable
- Custom label on Packing
- Colour

*DisplayPort™ and the DisplayPort™ logo are trademarks owned by the Video Electronics Standards Association (VESA®) in the United States and other countries.
USB Type-C® and USB-C® are registered trademarks of USB Implementers Forum.*